



dimension

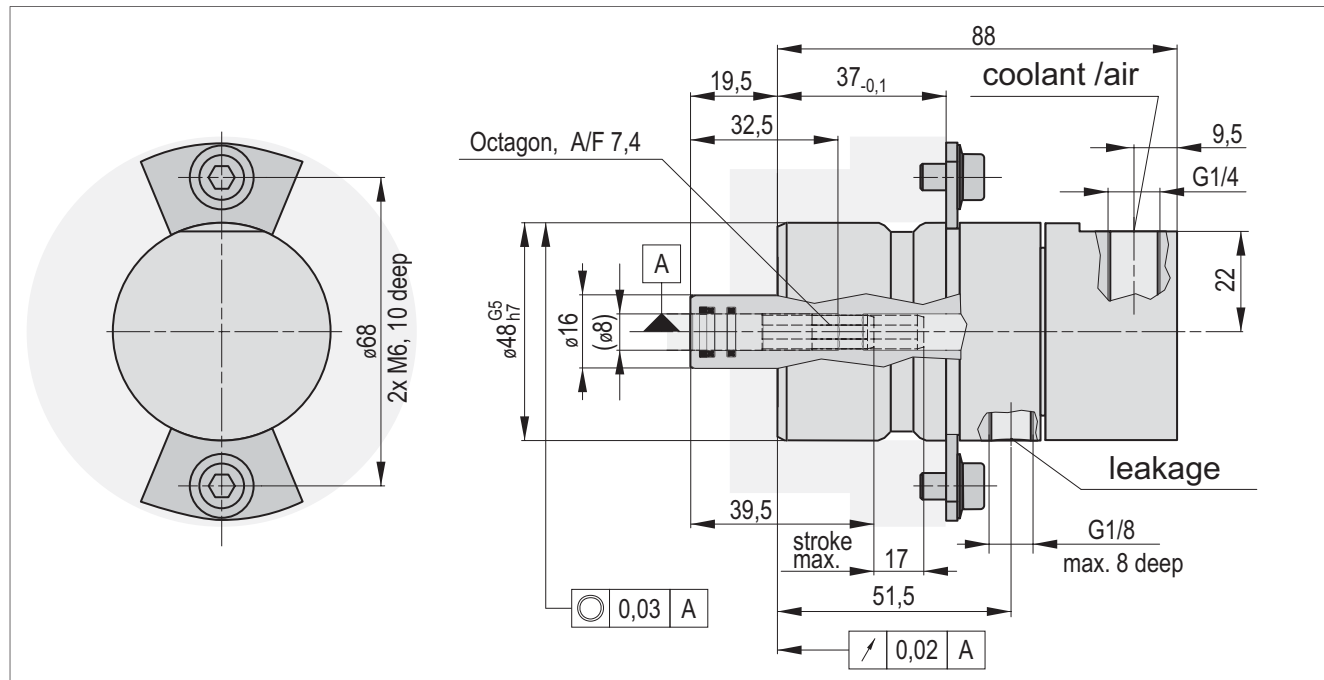

technical data

spindle speed max.	36000	min ⁻¹
coolant pressure max.	80	bar
cleaning air max.; n = 0 min ⁻¹	10	bar
pressure air max.; n < 10000 min ⁻¹	5	bar
(per discussion)		
required media purity		
according ISO 4406	-/17/14	
filter grade	< 50	µm

flow volume

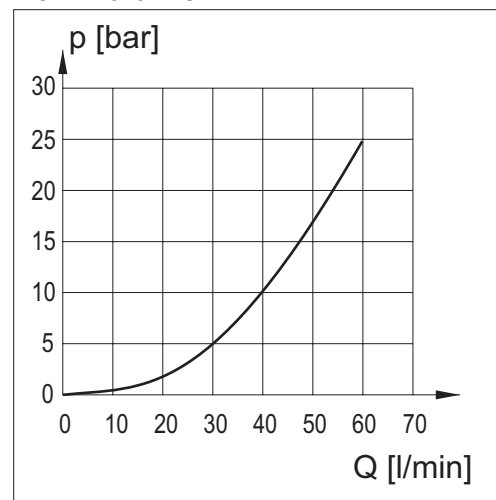

features

- hybrid bearing
- balanced design
- closed sealing surface
- coolant
- minimum volume lubrication (mixed externally) $p_{\max} = 5 \text{ bar}$
- dry operation
- passage min. $\varnothing 6 \text{ mm}$

code

2

1

order number

95.250.021.3.0