



## Type MI 210

2-way solenoid valve  
direct actuated, bistable



## Application



**Application**  
Neutral liquids, gases  
and vapors

[illegible]Sealing material: **P** (NBR) **E** (EPDM) **V** (FPM)

|                          |                                   |
|--------------------------|-----------------------------------|
| Body material:           | Brass                             |
| Inner parts:             | Stainless steel (1.4105)          |
| Mounting direction:      | Free, preferred upwards           |
| Max. ambient temp.:      | 50 °C                             |
| Viscosity of the medium: | max. 21 mm <sup>2</sup> /s (3 °E) |
| Static pressure:         | max. 10 bar                       |
| Standard voltage:        | DC: 24 V, 12 V, 9 V, 6 V          |

Power consumption: 2,5 W  
Pulse duration: 30 ms  
Voltage tolerance: -15%... +10%  
Operating frequency: max. 300/min  
Degree of Protection: IP 54 (EN 60529)

The right to modification is reserved

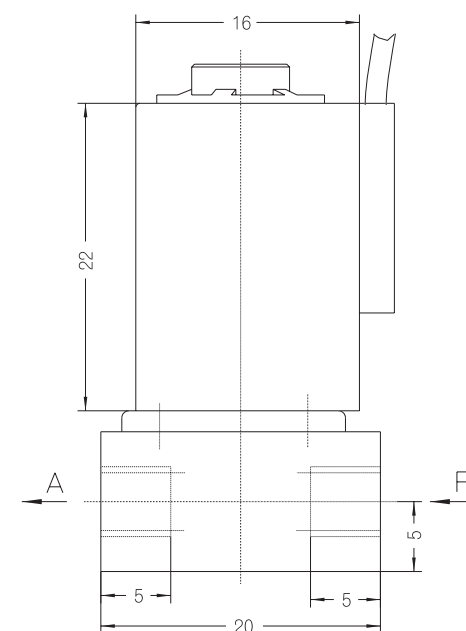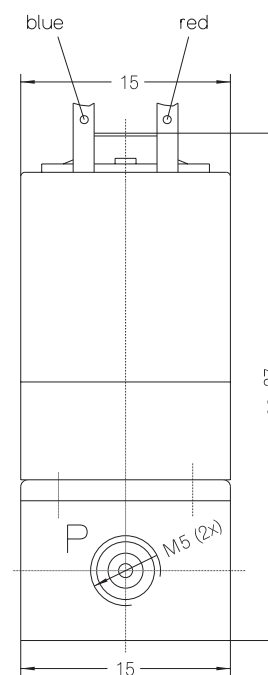

Dimensions in mm