

Typ MW 262

2/2-Wege-Magnetventil
vorgesteuert, NC
(stromlos geschlossen)



Anwendung
Neutrale, elektrisch leitende
Flüssigkeiten, Wasser




Typ/ Best.-Nr.	Nennweite [mm]	Anschluss	Druckdifferenz [bar] AC	kv-Wert [m³/h]	Gewicht [kg]
MW 262-001	10	G3/4i, G3/4a	0,5-10	1,2	1

Dichtwerkstoff: P (NBR) E (EPDM) V (FPM)

Gehäusewerkstoff: Messing
Innenteile: Edelstahl (1.4105)
Elektronikgehäuse: Polyamid, weiß
Einbaulage: beliebig
Zul. Umgebungtemp.: 0 °C... 50 °C
Standardspannungen: AC: 230 V (50 Hz)

Leistungsaufnahme: 11 W / 3 W
Zul. Spannungstoleranz: -15%... +10%
Rel. Einschaltdauer (ED): 100%
Sensorkabellänge: 2,5 / 5 / 10 / 20 m
Schutzart EN 60 529: IP 54
Schließimpuls ¹⁾ 3 x täglich 1 Sekunde

Andere Ausführungen auf Anfrage

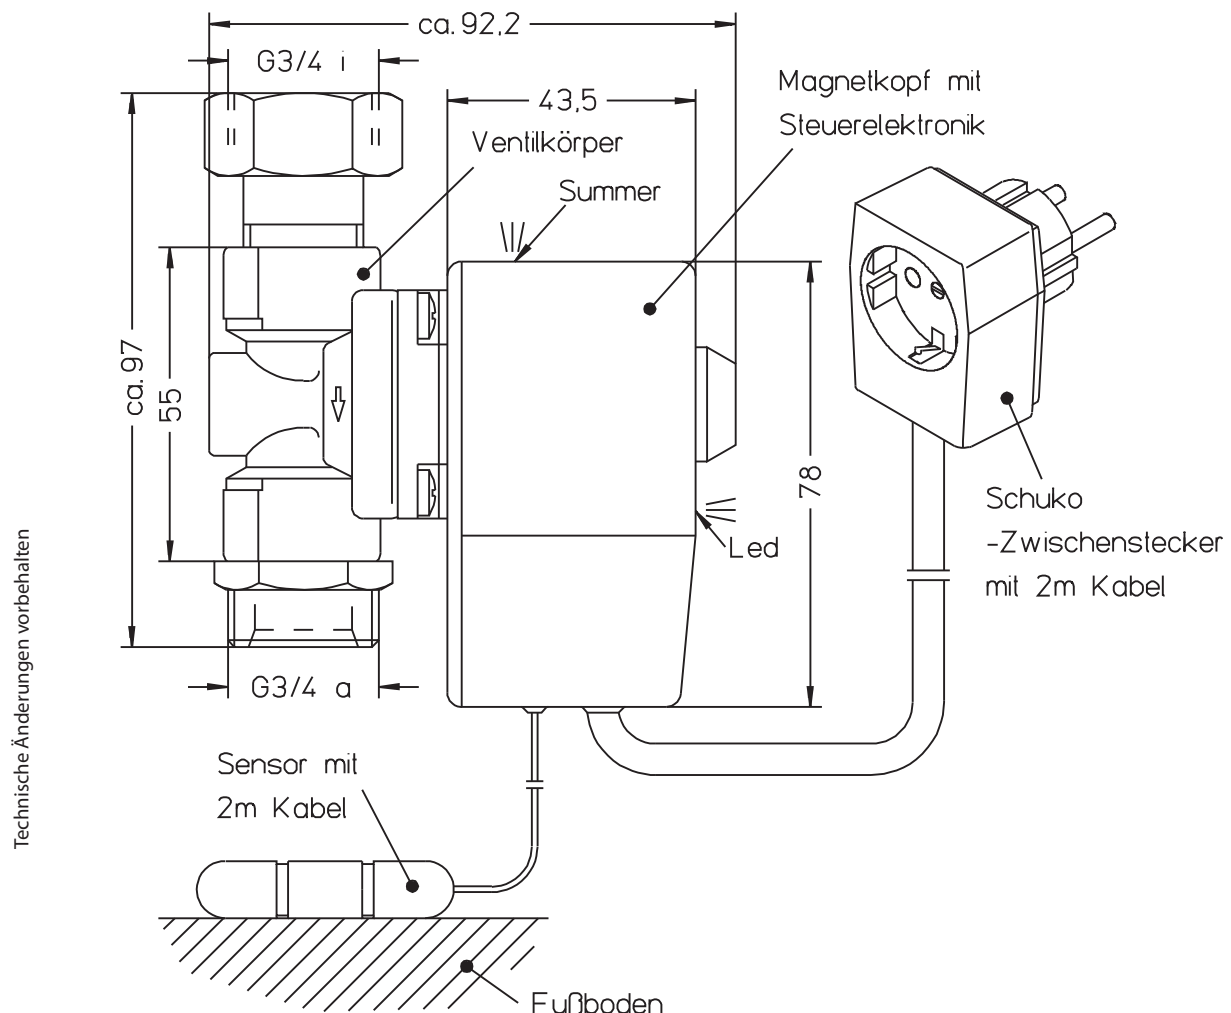

Type MW 262

2-way solenoid valve
servo actuated, NC (nor-
mally closed)



Application
Neutral, electrical conducting
liquids and water



Type/ Order No.	Orifice [mm]	Port size	Pressure range [bar] AC	kv-value [m³/h]	Weight [kg]
MW 262-001	10	G3/4i, G3/4a	0,5-10	1,2	1

Sealing material: P (NBR) E (EPDM) V (FPM)

Body material: Brass
Inner parts: Stainless steel (1.4105)
Electronics housing: Nylon (white)
Mounting direction: Free
Approved ambient temperature: 0° to 50 °C
Standard voltage: AC: 230 V, 115 V
(50 or 60 Hz)

Power consumption: 11 W / 3 W
Voltage tolerance: -15%... +10%
Duty cycle: 100 %
Sensor cable length: 2,5 / 5 / 10 / 20 m
Degree of protection: IP 54 (EN 60529)
Closing impulse : 3 x daily, 1 second

Other configurations upon request

